

SONANCE


DATA SHEET

R1CAB CABINET LCR SPEAKER

TECHNICAL SPECIFICATIONS

SKU	R1CAB 93348
UOM	Each
Tweeter	1" (25mm) ceramic dome, Ferrofluid cooled, acoustic back chamber
Midrange	5.25" (133mm) Carbon fiber/Rohacell laminated cone, rubber surround
Woofer	5.25" (133mm) Carbon fiber/Rohacell laminated cone, rubber surround
Frequency Response	70Hz-30kHz +/-3dB
Impedance	8 Ohms nominal; 6 Ohms minimum
Power Handling	5 Watts minimum; 150 Watts maximum
Sensitivity	90dB SPL (2.83V/1 meter)
Grille Material	Black cloth
Dimensions (WxHxD)	7.5" x 22" x 9.24" (191mm x 559mm x 235mm)
Shipping Weight	25 lbs (11.4 kg)

DIMENSIONAL DRAWINGS

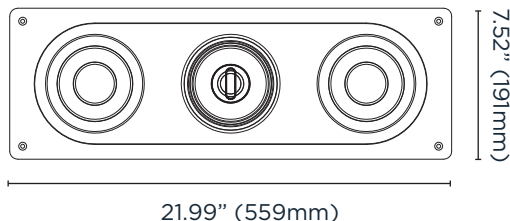

Front View



Side View

LIMITED FIVE (5) YEAR WARRANTY Sonance warrants to the first end-user purchaser that this Sonance-brand product ("Product"), when purchased from an authorized Sonance Dealer/Distributor, will be free from defective workmanship and materials for the period stated above. Sonance will at its option and expense during the warranty period, either repair the defect or replace the Product with a new or remanufactured Product or a reasonable equivalent. For more details please refer to the product manual.

©2021 Sonance. All rights reserved. Sonance is a registered trademarks of Dana Innovations. Due to continuous product improvement, all features and specifications are subject to change without notice. For the latest Sonance product specification information visit our website at www.sonance.com.

SONANCE • 991 Calle Amanecer • San Clemente, CA 92673 USA • Phone: (949) 492-7777 • Fax: (949) 361-5151 • Technical Support: (949) 492-7777 • www.sonance.com 08.11.2021